



Ferrule Connector (FC)



Local Connector (LC)





Standard Connector (SC)




Straight Tip (ST)

Category 3 UTP

Category 5 UTP

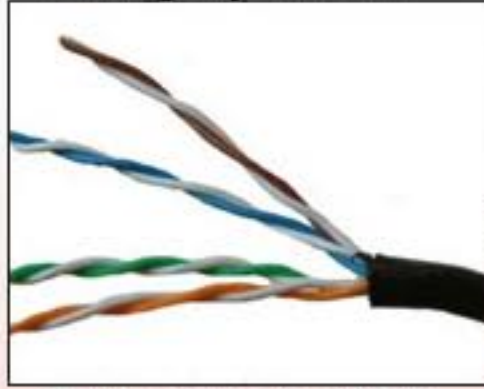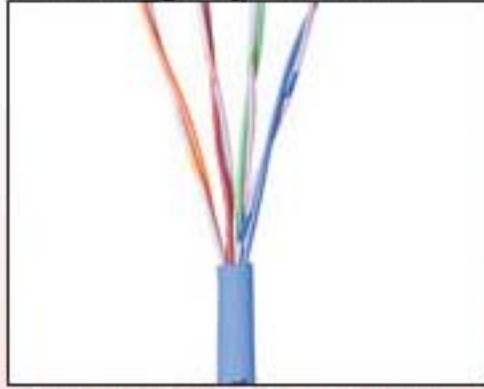




6 Pin 6 Connector (6P6C) (RJ11)



8 Pin 8 Connector (8P8C) (RJ45)

Category 5e UTP

Category 6 UTP

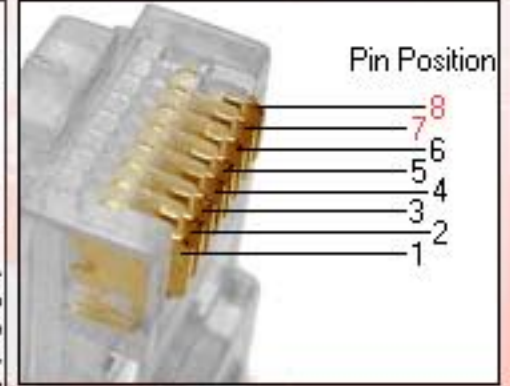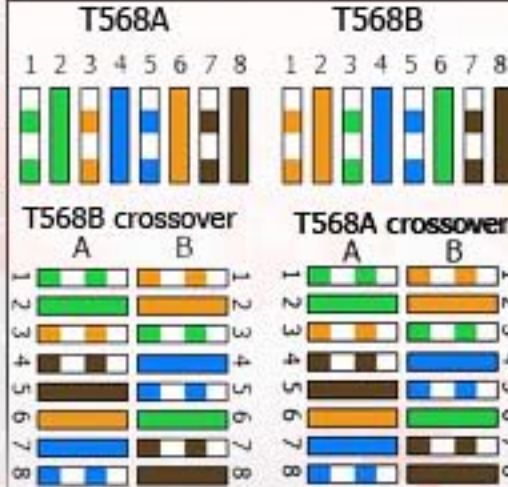
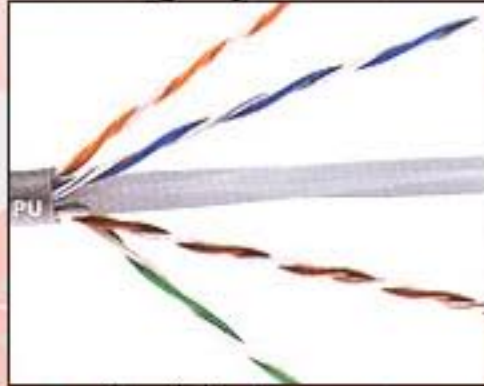


DATA CENTER TECHNICAL REFERENCE SHEET

Single Mode



Multi-Mode

10 Gig Fiber

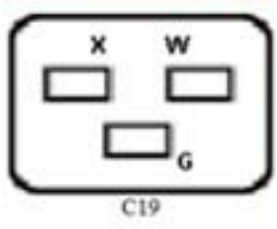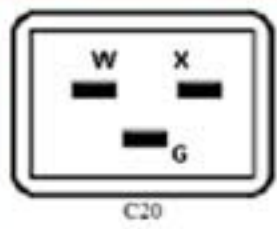




IEC 60320 C19/20
120/240 volt, Single Phase
3 wire, grounding
16 amp

IEC 60320 C13/14
120/240 volt, Single Phase
3 wire, grounding
10 amp

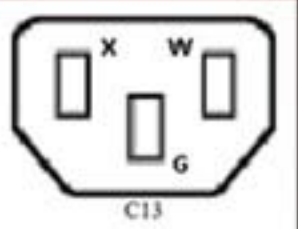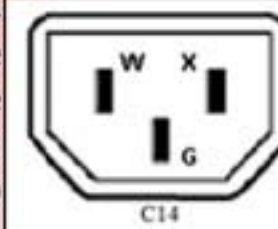





NEMA L5-20
120 volt, Single Phase
3 wire, grounding
20 amp

NEMA 5-15
120 volt, Single Phase
3 wire, grounding
15 amp

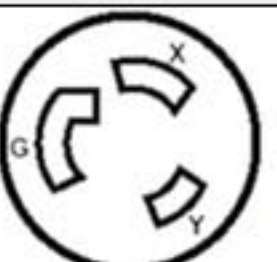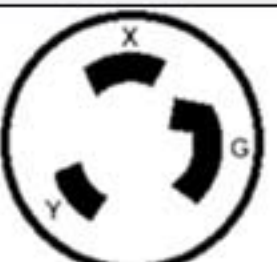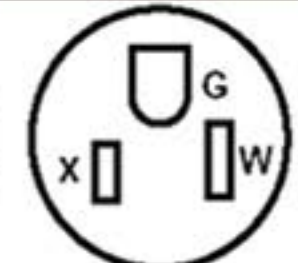





NEMA L6-30
240 volt, two pole
3 wire, grounding
30 amp

NEMA L6-20
240 volt, Two Pole
3 wire, grounding
20 amp

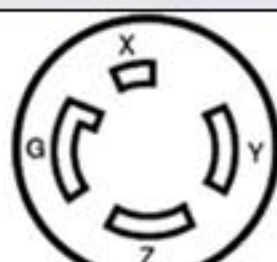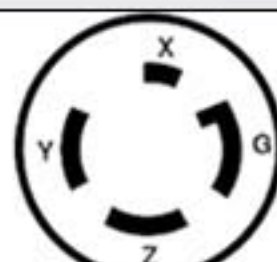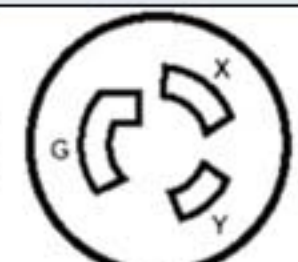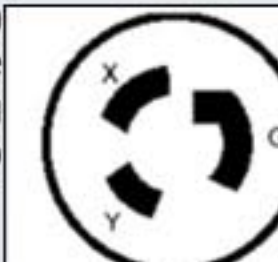



NEMA L15-30
240 volt, 3Ø,
three pole, 4 wire,
grounding
30 amp

NEMA L15-20
240 volt, 3Ø,
three pole, 4 wire,
grounding
20 amp

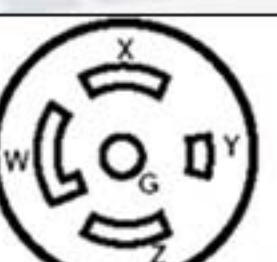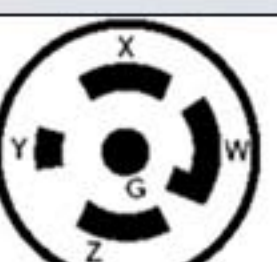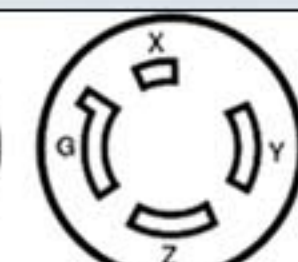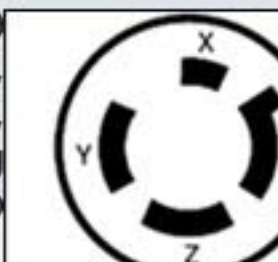

NEMA L21-30
120/208 volt, 3ØY,
four pole, 5 wire,
grounding
30 amp

NEMA L21-20
120/208 volt, 3ØY,
four pole, 5 wire,
grounding
20 amp

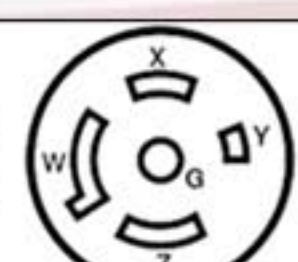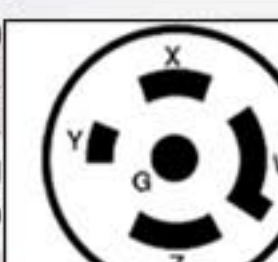

US DATA CENTER LIST



SilverBack
MIGRATION SOLUTIONS

www.USDATACENTERLIST.com www.teamsilverback.com